


COUNTY-W COUNTING SCALES

System: strain gauge Operating temperature: 0 +40°C
 Display: 3 groups of 14mm backlit LCDs RS232C serial output option
 Main: 110-120-220-240Vac 50/60Hz Optional printer interface
 Battery: Internal rechargeable

basic

8301.215 **750g**
8301.217 **3Kg**

Display resolution: 1/15,000
 Internal resolution: 1/300,000

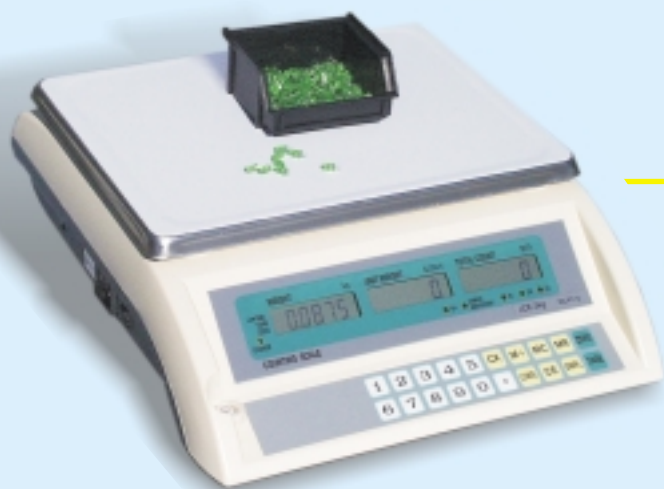

high resolution

8301.190 **3Kg**
8301.191 **6Kg**
8301.192 **15Kg**
8301.193 **30Kg**

Display resolution: 1/30,000
 Internal resolution: 1/480,000



professional

8301.200 **6Kg**

Display resolution: 1/30,000
 Internal resolution: 1/600,000

- Auto-Calibration: software
- 10 unit weight memory cells

MODEL	CAPACITY	DISPLAY RESOLUTION	INTERNAL RESOLUTION	MINIMUM UNIT WEIGHT	PLATTER SIZE
8301.215	300g	0,02g	0,005g	0,04g	Ø 150 mm
8301.217	750g	0,05g	0,01g	0,08g	235 x 178 mm
	1500g	0,1g	0,02g	0,2g	
	3000g	0,2g	0,04g	0,4g	
8301.190	3000g	0,1g	0,01g	0,1g	334 x 245 mm
8301.191	6000g	0,2g	0,02g	0,2g	334 x 245 mm
8301.192	15000g	0,5g	0,05g	0,5g	334 x 245 mm
8301.193	30000g	1g	0,1g	1g	334 x 245 mm
8301.200	6000g	0,2g	0,01g	0,1g	320 x 240 mm

8301.197 RS232C serial output option (to be installed before shipment),
8301.198 Optional printer interface (to be installed before shipment),

for models **8301.215/217**
 for models **8301.215/217**

8301.195 RS232C serial output option (to be installed before shipment),
8301.196 Optional printer interface (to be installed before shipment),

for models **8301.190/191/192/193**
 for models **8301.190/191/193/193**

8301.202 RS232C serial output option (to be installed before shipment),
8301.203 Optional printer interface (to be installed before shipment),

for models **8301.200**
 for models **8301.200**

portable

8301.236
8301.237

1Kg
4Kg

Display resolution 8301.236:

1/5.000


Display resolution 8301.237:

1/4.000



Precision Balance

Precision electronic balance with anti-dust and anti-wind covers for to minimise the mistakes caused by the environment. Normal weighting, piece counting, and percentage counting modes.

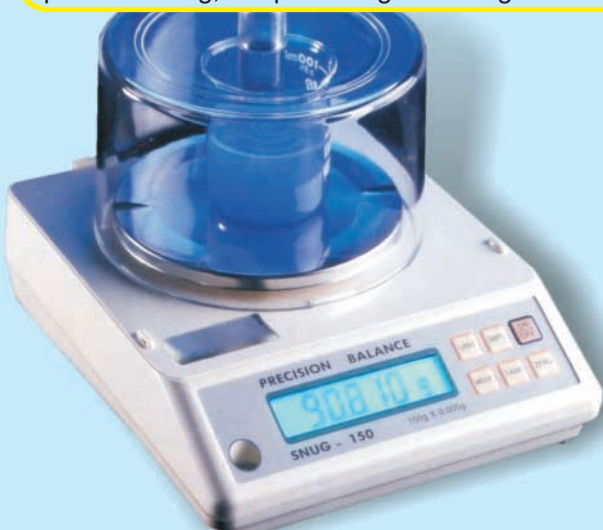

Weighing units: 13 selectable (Gram, Carat, Ounce, etc.)
 Pan size: Ø 125mm (4.9 inches)
 Scale dimensions: 220 x 180 x 160(H)mm
 Measuring system: Strain Gauge Load Cell
 Display: liquid crystal 14mm, with backlight
 Set up: can be configured by the customer
 Display resolution: 1 / 30,000
 Internal resolution: 1 / 150,000
 Interface: Uni-direction RS232C
 Power: AC/DC adaptor operated by 220 or 110Vac (specify in the order) with 4 alkaline batteries size C(UM-2), 100 hours operation

Model	Capacity	Display resolution	Internal resolution
8301.230	150g	0.005g	0.001g
8301.231	300g	0.01g	0.002g
8301.232	600g	0.02g	0.004g

Measuring system:

strain gauge

Pan size:

510 x 420mm (16 x 20inches)

Total height:

1m

Calibration:

by software

Display:

liquid crystal 14mm, with backlight

Set up:

can be configured by the customer

Power:

110-120-220-240Vac 50/60Hz

Internal rechargeable battery:

120 hours operation

Capacity	Display resolution	Internal resolution
60Kg	4g	0.8g
150Kg	10g	2g

8301.225
8301.221

Platform counting scale 60 / 150Kgs
Optional RS232C interface

Platform Counting Scale

Accurate and efficient industrial model, with two capacities selectable by software 60 and 150Kgs.



THERMAL LABEL PRINTER

8301.223 THERMO-ADHESIVE LABEL PRINTER, can be fitted to COUNTY-W counters for the printing of the following data:

total weight, unit weight
total quantity.

WARNING: optional printer interface must be added to the scale.

AC Adaptor 110-230Vac and Data Cable included.

8301.091 THERMO-ADHESIVE ROLL PAPER 30m length. It is possible to obtain about 500 labels.

